


Information Theory

Book II

Eg. an infinite stream of bits $a_0, a_1, a_2, a_3, \dots$ ($a_i \in F$) can be encoded eg. represent the plaintext bitstream as a $a_0 + a_1x + a_2x^2 + a_3x^3 + \dots \in F_2[[x]]$
 $F[[x]]$ = ring of (formal) power series in x with coefficients in F .

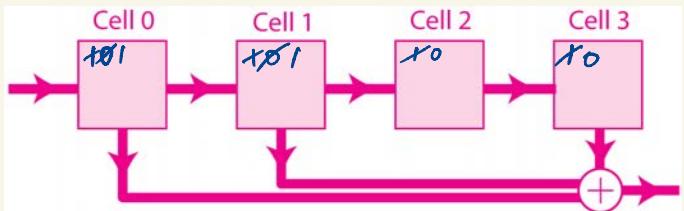


Eg. consider an input bitstream 110011011110010... which is encoded by the shift register above to obtain the output bitstream 101100101...


Compare: this is equivalent to multiplication by $1+x+x^3$:

$$(1+x+x^3)(1+x+x^2+x^3+x^4+x^5+x^6+x^7+\dots) = 1 + x^2 + x^3 + x^6 + x^8 + \dots$$

Decoding of this data is accomplished using backward shift registers eg.

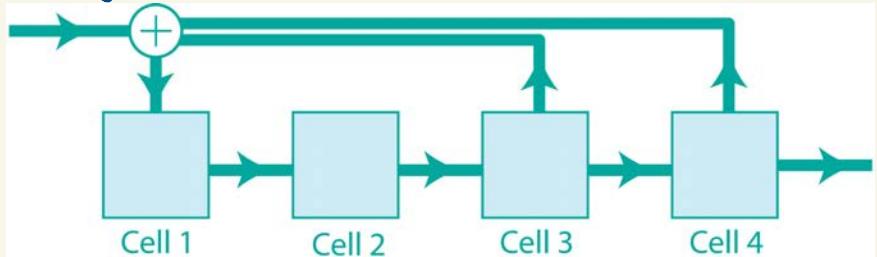

which performs division by $1+x+x^3$ in $F_2[[x]]$

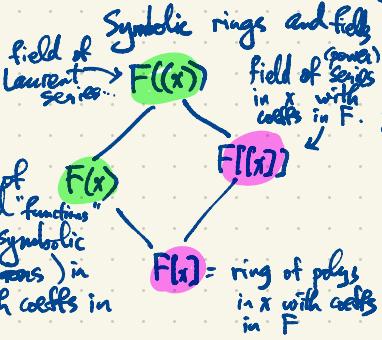

polynomials vs. polynomial functions

eg. $F_3 = \{0, 1, 2\} = \mathbb{Z}/3\mathbb{Z}$

eg. $f(x) = 2+x+x^3 \in F_3[x]$ is a polynomial of degree 3.


eg. $g(x) = 2+2x \in F_3[x]$ is a polynomial of degree 1.

a	$f(a)$	$g(a)$
0	2	2
1	1	1
2	0	0

for $g(x)$ are distinct poly's but they represent the same function $F \rightarrow F_3$.

eg. $f(x) = \frac{1+x+x^3}{x+x^2} \in F_2(x)$


Multiplication by any rational function can be implemented using a single shift register e.g. multiplication by $\frac{1+x+x^3}{1+x^2+x^3}$ is implemented using the shift register

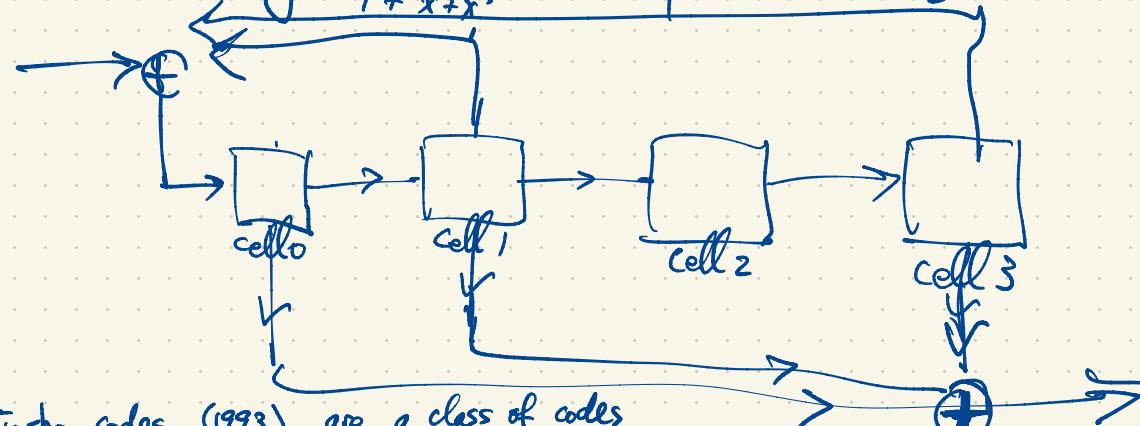

Turbo codes (1993) are a class of codes used for encoding streams of data using combinatorics of gates including

- multiplication by a rational function in $F(x)$
- splitters & interleavers
- permutations
- puncturing

e.g.

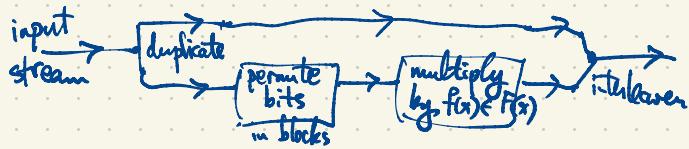

$$F(x) \subset F((x)) \quad \text{eg. for } F = \mathbb{F}_2 = \{0, 1\}$$

$$f(x) = \frac{1+x^2+x^5}{x+x^2+x^3} = \frac{1+x^2+x^5}{x(1+x+x^2)} = \frac{1}{x} \left[\frac{1+x^2+x^5}{1+x+x^2} \right] = \frac{1}{x} \left[1+x+x^3+x^5+\dots \right] = \frac{1}{x} + 1 + x^2 + x^4 + \dots$$

$$\frac{1+x^2+x^5}{1+x+x^2} = 1 + q_1 x + q_2 x^2 + q_3 x^3 + q_4 x^4 + q_5 x^5 + \dots$$

$q_1=1$ $q_2=0$ $q_3=1$ $q_4=0$ $q_5=1$
 $+ x + x^2 + x^3 + x^4 + x^5 + \dots$

$$1+x^2+x^5 = (1+x+x^2)(1+x+x^2+x^3+x^4+x^5+\dots)$$

$$(a+b)^2 = a^2 + b^2$$

$$(a+b)^4 = a^4 + b^4$$

Second method Geometric series $\frac{1}{1-u} = 1+u+u^2+u^3+u^4+\dots$

$$\begin{aligned} \frac{1+x^2+x^5}{1+(x+x^2)} &= (1+x^2+x^5) \left(1 + (x+x^2) + (x+x^2)^2 + (x+x^2)^3 + (x+x^2)^4 + (x+x^2)^5 + \dots \right) \\ &= (1+x^2+x^5) \left(1 + (x+x^2) + (x^2+x^4) + (x^3+x^5+\dots) + (x^4+\dots) + (x^5+\dots) + \dots \right) \\ &\quad (x^3+3x^5+3x^7+x^9) \end{aligned}$$

$$= (1+x^2+x^5)(1+x+x^2+x^3+\dots)$$

$$= 1+x+x^2+x^3+x^5+\dots$$

$$f(x) = \frac{1}{x} (1+x+x^2+x^3+\dots) = \frac{1}{x} + 1 + x^2 + x^3 + \dots$$

$F = F_2 = \{0, 1\}$ for the time being

The irreducible (monic) polynomials in $F[x]$:
degree irred. polys

- 1 $x, x+1$
- 2 $x^2 + x + 1$
- 3 $x^3 + x + 1, x^3 + x^2 + 1$
- 4 $x^4 + x + 1, x^4 + x^3 + 1, x^4 + x^3 + x^2 + x + 1$

primitive

not primitive

$$\begin{aligned} & x^2, x^2 + 1, x^2 + x, x^2 + x + 1 \\ & x - x(x+1) \quad "x(x+1)" \\ & x^4 + x^2 + 1 = (x^2 + x + 1)^2 \end{aligned}$$

all poly's of degree 2.

See MacWilliams & Sloane, The Theory of Error-Correcting Codes, for more extensive lists of irreducible polynomials.

What are all the cyclic (linear) binary codes of length 7? There are exactly 8 of them. (why?)

- subspace of F^7 , $F = F_2 = \{0, 1\}$
- invariant under cyclic shift $(a_0, a_1, a_2, a_3, a_4, a_5, a_6) \mapsto (a_6, a_0, a_1, \dots, a_5)$ $a_i \in F$

e.g. $\{(0000000)\}$

$\{0000000, 1111111\}$

A linear code $C \subseteq F^n$ is cyclic iff its dual code $C^\perp \subseteq F^n$ is also cyclic.

$$\dim C + \dim C^\perp = n$$

$$\begin{array}{cccccc} 1 & 1 & 1 & 0 & 1 & 0 & 0 \\ 0 & 1 & 0 & 1 & 0 & 0 & 0 \\ 1 & 0 & 1 & 1 & 1 & 0 & 0 \end{array}$$

$\{\text{words in } F^7 \text{ of even weight}\} = \langle 1100000, 1010000, 1001000, 1000100, 1000010, 1000001 \rangle$

Hamming $[7, 4, 3]_2$ code $\mathcal{H} = \langle 1101000, 0110100, \dots, 1010001 \rangle$ (all cyclic shifts of 1101000 span this code)

$$\dim \mathcal{H} = 4, |\mathcal{H}| = 2^4 = 16: \quad \text{1 codeword of weight 0}$$

$$\begin{array}{ccccccc} 7 & \cdots & \cdots & \cdots & 3 \\ 7 & \cdots & \cdots & \cdots & 4 \\ & & & & & & 7 \end{array}$$

Its dual \mathcal{H}^\perp , $\dim \mathcal{H}^\perp = 3$ is a $[7, 3, 4]_2$ -code.

\mathcal{H}^\perp has 1 codeword of weight 0

$$\begin{array}{ccccccc} 7 & \cdots & \cdots & \cdots & 4 \\ & & & & & & 4 \end{array}$$

$$\mathcal{H}^\perp = \mathcal{H} \cap \langle 1111111 \rangle$$

$\mathcal{H}^\perp = \langle 1011000, 0101100, \dots, 0110001 \rangle$ also $[7, 1, 3]_2$

\mathcal{H}^\perp also $[7, 3, 4]_2$

$$x^{q-1} \in F[x] \quad \text{where } n = \text{length} \\ \text{actually } x^{q-1}, \quad F = \mathbb{F}_2 \\ x^8 - 1 = \underbrace{(x-1)(x^6 + x^5 + x^4 + x^3 + x^2 + 1)}_{\text{i.e. } x+1} = (x-1) \underbrace{(x^3 + x + 1)}_{(x-\alpha)(x-\alpha^2)(x-\alpha^4)} \underbrace{(x^3 + x^2 + 1)}_{(x-\beta)(x-\beta^2)(x-\beta^4)}$$

$$\text{If } E = \mathbb{F}_q, \quad x^2 - x = \sum_{i=0}^{q-1} x^i (x-i)(x-q_1)(x-q_2) \cdots (x-q_{q-1})$$

i.e. x^{q-1} has $q-1$ distinct roots which are the nonzero field elements.

If $\alpha \in \mathbb{F}_8$ is a root of $x^3 + x + 1$

$$\begin{aligned} \mathbb{F}_8 &= \mathbb{F}_2[\alpha] = \{a_0 + a_1\alpha + a_2\alpha^2 : a_0, a_1, a_2 \in \mathbb{F}_2\} \\ &= \{0, 1, \alpha, \alpha+1, \alpha^2, \alpha^2+1, \alpha^2+\alpha, \alpha^2+\alpha+1\} \end{aligned}$$

Squaring is an automorphism of \mathbb{F}_8 .

$$(u+v)^2 = u^2 + v^2 \\ (uv)^2 = u^2 v^2$$

If $f(x) \in \mathbb{F}_p[x]$ is irreducible of degree d , then $\mathbb{F}_p[x]/(f(x)) \cong \mathbb{F}_{p^d} = \mathbb{F}_p[\beta]$ where β is a root of $f(x)$.
 $\mathbb{F}_{p^d} = \{0, 1, \beta, \beta^2, \beta^3, \dots, \beta^{p^d-2}\}$ then we say β is a primitive element and we say $f(x)$ is a primitive polynomial.

$$\begin{aligned} \mathbb{F}_{p^d} &= \{a_0 + a_1\beta + a_2\beta^2 + \dots + a_{d-1}\beta^{p^d-1} : a_i \in \mathbb{F}_p\} \\ (\beta \text{ generates } \mathbb{F}_{p^d}) &\Rightarrow \mathbb{F}_{p^d} \text{ is a field} \end{aligned}$$

If $f(x) = x^4 + x^3 + x^2 + x + 1$ and $\beta \in \mathbb{F}_{16} = \mathbb{F}_2$ is a root of $f(x)$ then $\beta^5 = 1$ since β is a root of $f(x)$
 $0, 1, \beta, \beta^2, \beta^3, \beta^4, 1, \beta, \beta^2, \dots$ doesn't give all of \mathbb{F}_{16} .

$$\beta^5 - 1 = (\beta - 1)(\beta^4 + \beta^3 + \beta^2 + \beta + 1) = 0$$

There are eight ways to factor $x^7 - 1 = g(x)h(x)$ in $\mathbb{F}_2[x]$. In each case $g(x)$ is a generator poly. and $h(x)$ is a parity check poly. for a cyclic code of length 7 over $\mathbb{F}_2 = \{0, 1\} \subset \mathbb{F}$.

Cyclic codes $\xrightarrow{\text{(linear)}}$ ideals in $\mathbb{F}[x]/(x^7 - 1)$

$$g(x) = 1, \quad h(x) = x^7 - 1, \quad \text{gives } \mathbb{F}^7$$

$$g(x) = x^7 - 1, \quad h(x) = 1 \quad \text{gives } \{0000000\}$$

$$g(x) = x+1, \quad h(x) = x^6 + x^5 + x^4 + x^3 + x^2 + x + 1 \quad \text{gives all words of even weight i.e. } \langle 1100000, 1010000, \dots, 1000001 \rangle$$

$$g(x) = x^6 + x^5 + \dots + 1, \quad h(x) = x+1 \quad \text{gives } \langle 111111 \rangle = \{0000000, 1111111\}$$

$$g(x) = 1+x+x^3, \quad h(x) = 1+x^2+x^3+x^4 \quad \text{gives } \mathcal{H} \quad [7, 4, 3]_2 \text{ code}$$

BCH bound : a lower bound for performance of a cyclic code.

Consider a cyclic code of length n over \mathbb{F} , i.e. an ideal in $\mathbb{F}_q[x]/(x^n - 1)$ with gen. poly. $g(x)$, parity check poly. $h(x)$, $x^n - 1 = g(x)h(x)$, $g(x)$ primitive, β root of $g(x)$ in \mathbb{F}_{q^r} , $r = \deg g(x)$, and $\beta, \beta^2, \dots, \beta^{n-1}$ are roots of $g(x)$, then the code has min. distance $\geq s$.

For Hamming $[7, 4, 3]_2$ code β root of $g(x) = 1+x+x^3 \in \mathbb{F}[x]$, $\beta \in \mathbb{F}_8 = \mathbb{F}_2[\beta]$
 Also β^2 by Freshman's Dream

$$\begin{aligned} 1+\beta+\beta^3 &= 0 \\ (1+\beta+\beta^3)^2 &= 1+\beta^2+\beta^6 = 0 = 1+\beta^2+(\beta^2)^3 \end{aligned} \Rightarrow \mathcal{H} \text{ has min. dist. } \geq 3.$$



BCH : R.C. Bose
 Dijen Ray-Chaudhuri
 Hoquengham

The Gilbert-Vershamov Bound (GV-bound) : a lower bound for existence of good codes
 $A_q(n, d) = \max |C|$ s.t. $C \subseteq A^n$, $|A|=q$ with min. distance $\geq d$ i.e. $d(w, w') \geq d$ for all $w \neq w'$ in C .

Ball of radius r in A^n centered at "0" $\in A^n$ $e = \lfloor \frac{d-1}{2} \rfloor$ = error-correcting capability.

has cardinality $|B_r| = \sum_{k=0}^r \binom{n}{k} (q-1)^k$ $1 = |B_0| < |B_1| < |B_2| < \dots < |B_n| = |A^n| = q^n$

Hamming bound: $A_q(n, d) \leq \frac{q^n}{|B_e|}$: balls of radius e centered at codewords $w \in C$ are required to be disjoint

$$\bigsqcup_{w \in C} B_e(w) \subseteq A^n \Rightarrow |C| \cdot |B_e(w)| \leq q^n \Rightarrow |C| \leq \frac{q^n}{|B_e(w)|}$$

In the other direction the GV-bound

$$A_q(n, d) \geq \frac{q^n}{|B_{d-1}(0)|} \quad \text{so} \quad \frac{q^n}{|B_{d-1}(0)|} \leq A_q(n, d) \leq \frac{q^n}{|B_e(0)|}$$


Proof: Let $C \subseteq A^n$ be any q -ary code with $|C| = A_q(n, d)$. We claim

$$\bigcup_{w \in C} B_{d-1}(w) \supseteq A^n.$$

If not, there exists $w' \in A^n$, $w' \notin \bigcup_{w \in C} B_{d-1}(w)$ so $d(w', w) > d-1$ for all $w \in C$.

But then $C \cup \{w'\}$ has min. distance $\geq d$. This contradicts the maximality of C among all q -ary codes of length n having min. distance d .

$$\text{So } |C| |B_{d-1}(0)| \geq |A^n| = q^n.$$



Asymptotic version of GV-bound due to Shannon:

Fix $0 < \delta < 1$. $|B_{S_n}(0)| \approx |A^n|^{h_q(\delta)} = q^{n h_q(\delta)}, \quad 0 \leq h_q(\delta) \leq 1.$

$$\log_2 |B_{S_n}(0)| \approx n h_q(\delta)$$

This is a true asymptotic formula: for fixed q and $\delta \in (0,1)$,

$$\frac{\log_2 |B_{S_n}(0)|}{n h_q(\delta)} \rightarrow 1 \quad \text{as } n \rightarrow \infty.$$

$$\log_2 |B_{S_n}(0)| \approx n h_q(\delta).$$

More precisely,

$$n h_q(\delta) - o(1) \leq \log_2 |B_{S_n}(0)| \leq n h_q(\delta)$$

The q -ary entropy function $h_q(\delta) = \delta \log_q(q-1) - \delta \log_q \delta - (1-\delta) \log_q (1-\delta)$

binary entropy function $h_2(q) = -\delta \log_2 \delta - (1-\delta) \log_2 (1-\delta) = \delta \log_2 \frac{1}{\delta} + (1-\delta) \log_2 \frac{1}{1-\delta}$